

# FERRI®

[www.ferri-america.com](http://www.ferri-america.com)



## VIP88

### **Central or Offset Mowers**


• Grass • Twigs • Tractors from 60 to 90 HP

 88"



# Central or Offset Mowers

• Grass • Twigs • Tractors from 60 to 90 HP

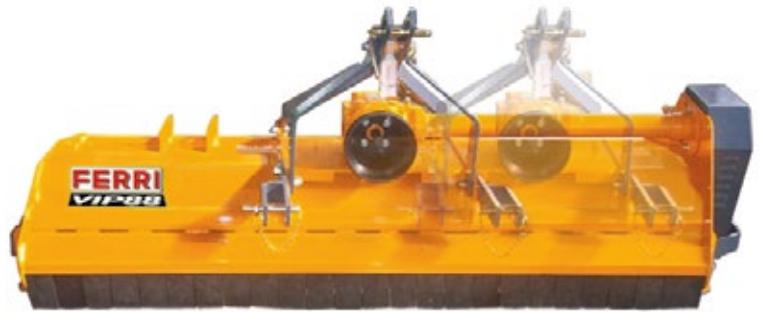

VIP 88 - Central or Offset mowers

## Technical specifications

Mod.	<b>VIP88</b>	
Total working width	in	88
Total width	in	100
Weight	lbs	1110 (1120*)
Attachment to tractor	3 pt linkage	
Number of flails	nr	96
Rotor dia. & thickness	in	4 3/4" - 3/8"
Rotor dia with flails	in	15 1/2"
Rear roller dia. & thickness	in	6" - 1/4"
Cutting height adjustment	3 positions	
Gearbox max power transmission	kW	52
Number and type of belts	n°	3x SPBX

\*central version

## Working positions

<b>VIP 88 Offset</b>	22"  66"
<b>VIP 88 Central</b>	44"  44"

## Strong points



Articulated "Y" Blades for grass and twigs. Max 1". Heavy duty (5/32" thick)



Replaceable heavy duty wear skids.



Three SPBX belts transmitting 52 kW power. The drive pulley is coupled using tapered spline.



The rotor shaft is well protected by an end shield and a protection ring. This avoid that dust and debris enter the bearings area.



Belt transmission can be tensioned mechanically by shifting the shaft and gearbox through the bolts provided (see above). In this way the tensioning is very precise.



The belt transmission box is well protected all over no risk that dust and debris reach the transmission system causing quick wear of belts and pulleys




Front protection with heavy duty rubber flaps. These flaps are pivoting around a steel shaft therefore they will let the vegetation enter the mulching area.



Our flails are mounted on a single drop forged support (1" thick) the pivoting bolt works on a 1" surface. HD flails are 5/32" thick.



Three point linkage made of steel bars 5/8" thick.



Rear roller.



A slot in both side walls, permit a quick release of the rotor for replacement or maintenance.



**FERRI srl**  
Via Govoni, 30 - 44034 Tamara (FE) Italy  
Tel. +39 0532 866866 - Fax +39 0532 866851  
info@ferrisrl.it - www.ferrisrl.it



**North America Sales and Marketing Manager / FERRI**  
Ronald E. Roglis  
Glenarm, Illinois 62536  
Cell (314) 422-9460  
Fax (217) 483-4123  
E-mail: ron.roglis@gmail.com

**Parts Stock / FERRI:**  
J.S. Woodhouse Co., Inc.  
1314 Union Street - P.O. Box 1169  
West Springfield, Ma. 01090 U.S.A.  
tel. 413-736-5462  
fax 413-732-3786  
info@jswoodhouse.com