



MCR Mid Capacity Hay Rake

The all new rigorously tested Mid Capacity Rake or MCR. This highly adaptable carted style wheel rake will change and adapt to nearly any raking condition. From wheel pressure settings, to one sided raking, to adjusting to a precise windrow width and actually growing in size as you grow your operation. If you want versatility and speed from the seat of your tractor, you got to get a Pequea MCR.




Pequea reserves the right to change specifications, design and price of products described in this literature without notice. © 2010 Pequea.



MCR Mid Capacity Hay Rake




Counter Balance Valves for Steady Single Side



3 Collection width Settings

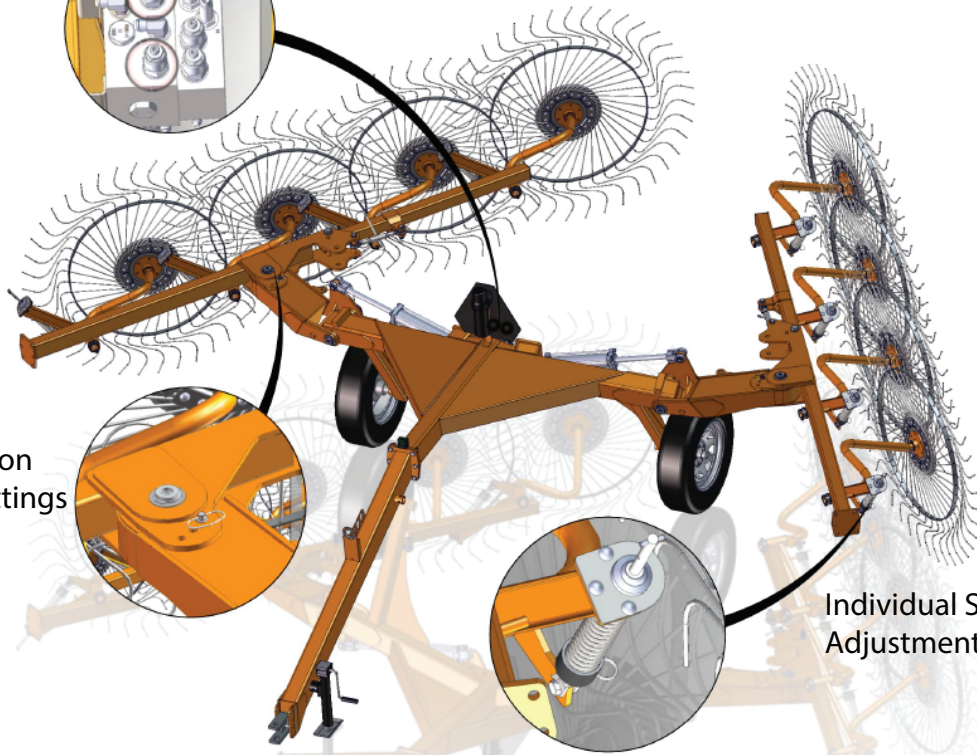

Individual Spring Adjustment



Models	MCR8	MCR10	MCR12
Number of Wheels	8	10	12
Wheel Diameter	55"	55"	55"
Tines per wheel	40 - .273 (7mm) Dia.		
Rake Wheel Suspension	Individual compression spring (1 per arm)		
Rake Wheel Arms	Independent arms with greasable bushing		
Dimensions			
Overall Length, ft (m)	21'	23'	25'
Transport Height, ft (m)	8'3"	8'10"	9'5"
Transport Width, ft (m)	12'2"		
Wheel Tread Width, ft (m)	7'		
Tires	205/75 R15		
Working Width			
Minimum, ft (m)	17	19	21
Maximum, ft (m)	19	21	23
Windrow Width			
Minimum, ft (m)	3		
Maximum, ft (m)	5		
Tractor Requirements			
Pressure	1200-1400		