




www.ferri-america.com

Heavy duty improvements

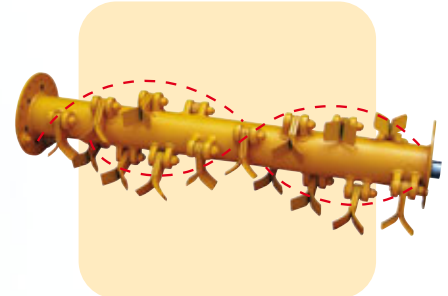

"OVERLAP" spiral rotor with two spiral rows.



Drop forged arm brackets and flail head linkage.



Boom mowers









• Agriculture • Green areas • Tractors from 60 to 90 HP

TP 51 FARM

60 to 80 HP 15' 9"

TP 61 FARM


70 to 90 HP 19' 5"

Equipment	TP
 Floating (flail head is free to float to follow ground contours)	●
 Lift float (via accumulator)	●
 "OVERLAP" spiral rotor with two spiral rows	●
 115° Power Slew	●
 "DELTA FRAME BOX" giving counterbalance weight distribution	●
 Oil cooler with thermostat	●
 Cable controls	●
 Reversible rotor	●
Cast iron pump and motor group 3	●
Totally independent hydraulic system	●
Direct drive	●
Front and rear rubber guard	●

● Standard □ Optional

Technical specifications			
		TP51	TP61
Mod.			
Max. horizontal reach	ft	15'9"	19'5"
Power Slew		115°	115°
Weight	lbs	1885	2017
Hydraulic oil capacity	Gal	36	36
Three point linkage	Cat.	II	II
Pto speed	RPM	540	540

Working positions

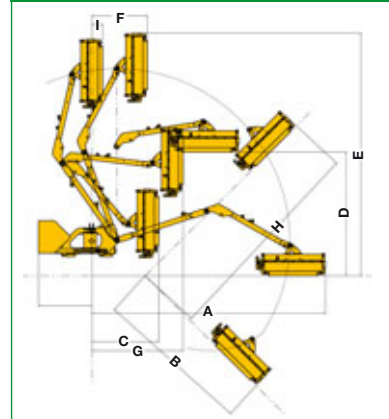

	TP51	TP61
A ft.	15'9"	19'5"
B ft.	10'7"	14'2"
C ft.	4'6"	4'7"
D ft.	8'5"	10'10"
E ft.	16'6"	20'2"
F ft.	3'9"	3'9"
G ft.	6'2"	7'1"
H ft.	14'5"	18'0"
I ft.	0'8"	0'5"

Tractors (recommended features)				Min. weight	Min. width	
HP Tractor	60	70	80	90	lbs	ft
TP 51	[Bar]				6614	6'7"
TP 61	[Bar]				7050	7'3"

Flail heads





Technical specifications of flail head		
	TI 120	
Width of cut	in.	47
Rotor speed	RPM	3100
Flail head angle		190°
Power available to rotor	HP	35
Hydraulic motor	HP max	45

Accessories

 <p>CS 150 Cutter bar max cut 1/2" Width of cut 59"</p>	 <p>TR13 - TR22 Cutter bar - max cut 3 1/4" Width of cut: 51" (TR13) 87" (TR22)</p>	 <p>FF45 - FF60 Ditch cleaners Width 18" & 24"</p>
---	---	--

Blades interchangeable on same motor

 <p>No. 44 Multi-use blades: grass, shrubs, bushes, sticks, wood. max cut 1 1/4"</p>	 <p>No. 22 "T" hammer blades for wood max cut 1 3/4"</p>
--	--