

FERRI®

www.ferri-america.com



MT



Mowers

• Grass • Twigs • Tractors from 30 to 70 HP

MT 140

 30 to 45 HP  4'7"

MT 180

 45 to 60 HP  5'10"

MT 160

 35 to 50 HP  5'3"

MT 200

 50 to 70 HP  6'6"



Mowers

• Grass • Twigs • Tractors from 30 to 70 HP



Central and offset linkage




Adjustable rear roller with scraper



Rotor with internal sealed bearings



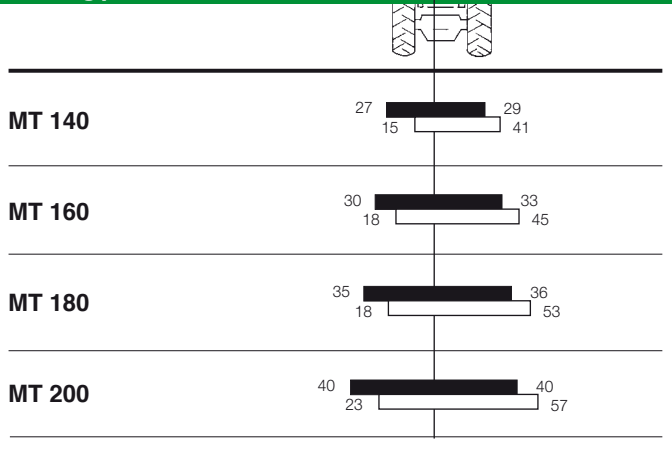

Working positions



Technical specifications

Model		MT 140	MT 160	MT 180	MT 200
Cutting width	ft	4'7"	5'3"	5'10"	6'6"
Three point linkage	Cat.	0 - I	0 - I	I - II	I - II
Weight	lbs	705	794	926	1014
Required tractor engine power	HP	30/45	35/50	45/60	50/70

Flails	MOD.	MT 140	MT 160	MT 180	MT 200
 "Y" flails max cut 1 1/4"	No.	32	40	48	48
 Hammer blades max cut 1 3/4"	No.	16	20	24	24



FERRI srl Via C. Govoni, 30 - 44034 Tamara (FE) Italy
Tel. 011-39-0532.866866 - Fax 011-39-0532.866851 - www.ferrisrl.it - info@ferrisrl.it

Customer Service Sales & Marketing/FERRI:

Don Garner
Vancouver, WA 98682
tel. 360-281-3641
d.garner@ferrisrl.it

Parts Stock / FERRI:

J.S. Woodhouse Co., Inc.
1314 Union Street
P.O. Box 1169
West Springfield, Ma. 01090 U.S.A.
tel. 413-736-5462
fax 413-732-3786
info@jswoodhouse.com

All data subject to change.

MT219A REV/09 10/13

campbelladv.com 55613