



Mounted side-delivery rake

Mounted side-delivery rake




TECHNICAL DATA:
 Working width-raking 79 in. (mt. 2,00)
 Working width-spreading and turning
 79 in. (mt. 2,00)
 Weight 145 lbs (66 kg.)



TECHNICAL DATA:
 Working width-raking 103 in. (mt. 2,60)
 Working width-spreading and turning
 114 in. (mt. 2,90)
 Weight 396 lbs (180 kg.)




TECHNICAL DATA:
 Working width-raking 138 in. (mt. 3,50)
 Working width-spreading and turning
 154 in. (mt. 3,90)
 Weight 440 lbs (200 kg.)



Wheel diameter 55 

Teeth number each 


Teeth diameter 0,28 

Rake with very sturdy equipment. Independent and interchangeable wheels mounted on roller bearings. Left and right SPREADING - TURNING and RAKING action, also suitable for limited place.

8
RP

TECHNICAL DATA:
Working width-raking 217 in. (mt. 5,50)
Working width-spreading and turning
240 in. (mt. 6,10)
Weight 1.013 lbs (460 kg.)



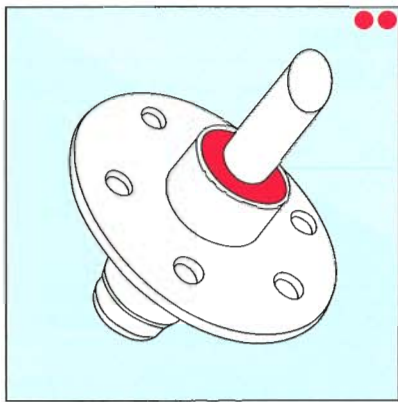

Hubs with sealed dust-covers on all our machinery




TECHNICAL DATA:
 Working width-raking mt. 7,50
 Working width-spreading and turning
 mt. 8,70
 Weight kg. 520


RP10




Performance valid for all hay rakers of our production.



Raking



Spreading



Turning

SITREX S.p.A. reserves the right to make changes or add improvements at any time without notice. The information contained herein is general in nature and is not intended for specific application purposes.



AGRICULTURAL MACHINERY
sitrex
 S.p.A.

Zona Industriale - Viale Grecia, 8
 06018 TRESTINA (Perugia) - ITALY
 Phone ++39075 8540021 r.a. - Fax ++39075 8540523
 E-mail: sitrex@sitrex.it - http://www.sitrex.com