

Turbo Rakes

PEQUEA
A SKIBO COMPANY[®]



Turbo Rakes™


Pequea Turbo Rakes™ feature a high frame and wheel beam resulting in high ground clearance so your hay doesn't get caught up in the rake, and allows for easy transport with exceptionally low height in transport. All models feature an individual arm with suspension on each wheel, resulting in improved tine wear. The Pequea Turbo Rake™ is available in 8, 10, and 12 wheel models with raking widths ranging from 16' – 23'.



TR12

Turbo Rake Patented Hydraulic System

Heavier sections of hay are no match for this exclusive Pequea feature. Our hydraulic system allows you to quickly open the windrow width while still raking hay, so the heavier hay can pass through the rake without plugging and without the front wheels skipping all of the hay.

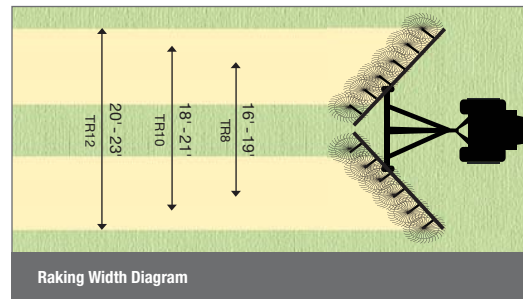

Turbo Rakes

Specifications	TR8	TR10	TR12
Raking Width	16' - 19'	18' - 21'	20' - 23'
Windrow Width Range	2' - 6'	2' - 6'	2' - 6'
Number of Wheels	8	10	12
Rake Wheel Diameter	55"	55"	55"
Number of Tines per Wheel	40 - .273 (7mm) Dia. Tines		
Rake Wheel Hubs and Bearings	Greaseable Tapered Roller Bearings		
Rake Wheel Suspension	Independent Compression Spring - 1 per Arm		
Rake Wheel Arms	Independent Arms (1 per Wheel) w/ Greaseable Bushing at Pivot		
Rake Wheel Pressure Adjustment	Tightener Bolt on Each Spring		
Wheel Arm Beam Ground Clearance	36"	36"	36"
Frame Ground Clearance	26"	26"	26"
Transport Folding Control	Double Hydraulic Cylinders with Independent or Even Lift Control		
Transport Tires	205/75-15 LR D Tire		
Transport Width	8' 9"	8' 9"	8' 9"
Transport Height	6' - 8'	6' - 8'	7' - 9'
Weight (lbs.)	1564 lbs.	1736 lbs.	1950 lbs.

Pequea reserves the right to change specifications, design and price of products described in this literature without notice. © 2010 Pequea.