




TR/6-7-8-9 S



Sitrex TR/6-7-8-9 S Hay Rake is technically designed to provide a fast and careful raking, while it handles hay gentler than any other ordinary parallel bar rakes. Among its main features, along with gentle handling of hay, Columbia is particularly suitable for rough soils and it is more useful for low crops and for wide windrows at higher speed. The nine independent spring loaded wheels follow the contours of the ground independently one from the other and from the frame.



TECHNICAL DATA

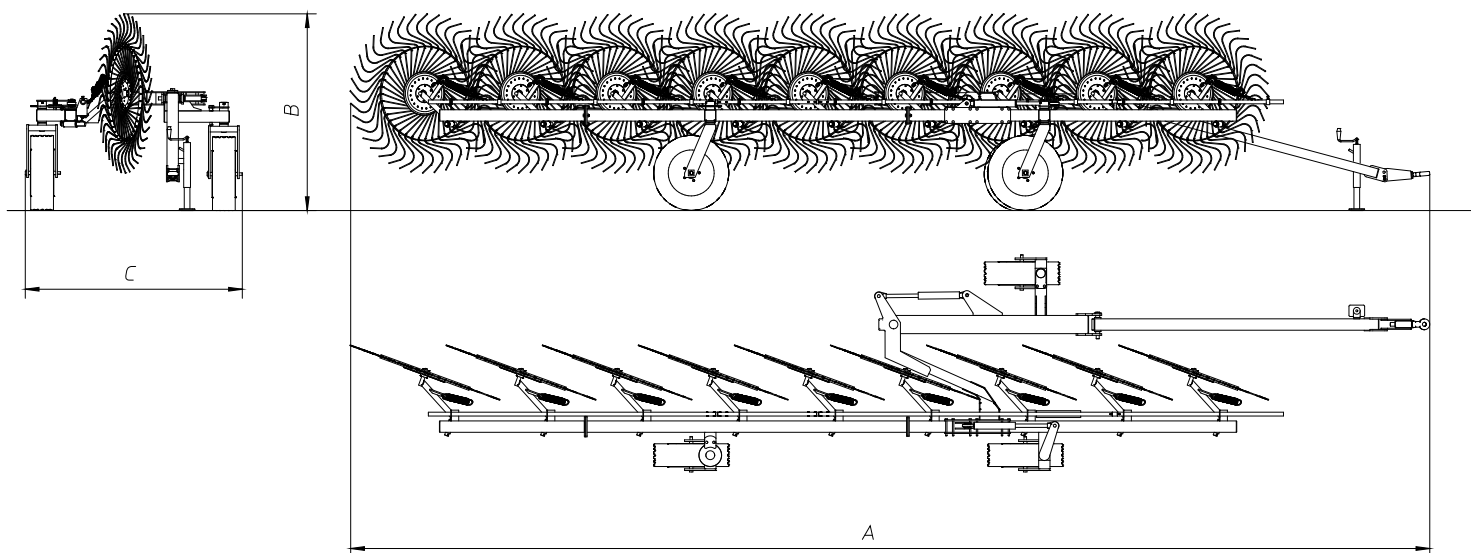

MODELS	TR/6 - S	TR/8 - S	TR/7 - S	TR/9 - S
Weight	675 Kg / 1485 lbs	745 Kg / 1640 lbs	700 Kg / 1540 lbs	780 Kg / 1720 lbs
Overall length (A)	7.1 m / 23'	8.75 m / 26'3"	7.95 m / 23'4"	9.65 m / 31'6"
Transport height (B)	1,7 m / 67"	1,7 m / 67"	1,7 m / 67"	1,7 m / 67"
Transport width (C)	1.95 m / 77"	1.95 m / 77"	1.95 m / 77"	1.95 m / 77"
Number of wheels	6	8	7	9
Number of tines on each wheel	40	40	40	40
Tines diam.	7mm / 0.3"	7mm / 0.3"	7mm / 0.3"	7mm / 0.3"
Wheel diam.	1,4 m. / 55"	1,4 m. / 55"	1,4 m. / 55"	1,4 m. / 55"
Raking working width	4 m. / 13'2"	5 m. / 16'5"	4,5 m. / 14'9"	5,5 m. / 18'
Working speed	22 kmh / 14 mph	22 kmh / 14 mph	22 kmh / 14 mph	22 kmh / 14 mph
HP required min	30 HP / 22 kW	30 HP / 22 kW	30 HP / 22 kW	30 HP / 22 kW