


FERRI®

www.ferri-america.com

Heavy duty improvements

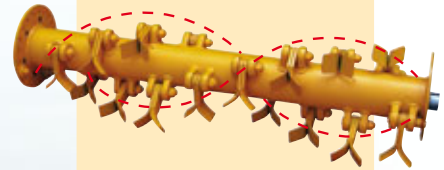

"OVERLAP" spiral rotor with two spiral rows



Drop forged arm brackets and flail head linkage.



FARM



FARM

electra

Boom mowers

• Agriculture • Light green maintenance • Tractors from 50 to 70 HP

TM 46 FARM

 50 to 70 HP  15' 3"



Boom mowers

• Agriculture • Light green maintenance • Tractors from 50 to 70 HP



Equipment

	Floating (flail head is free to float to follow ground contours)	●
	Lift float (via accumulator)	□
	"OVERLAP" spiral rotor with two spiral rows	●
	Drop forged flail head linkage	●
	Oil cooler with thermostat	□
	Cable controls	●
	Mono lever electric controls "Soft Start/Stop" (only Full Electra version)	●
	Reversible rotor	●
	Cast iron pump and motor group 3	●
	Totally independent hydraulic system	●
	Direct drive	●
	Front and rear rubber guard	●


● Standard □ Optional

Technical specifications

Max. horizontal reach	ft.	15'3"
Weight	lbs	1713
Hydraulic oil capacity	gal	33
Three point linkage	Cat.	II
Pto speed	RPM	540
Power to the rotor	HP max	35
Hydraulic motor	HP max	45



Mechanical breakaway

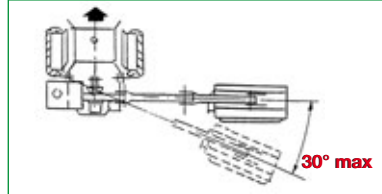

Tractors (recommended features)				Min. weight	Min. width
HP Tractor	50	60	70	lbs	ft
TM 46				5512	5'11"

Working positions

Working positions		TM46 Farm
	A ft	15'3"
	B ft	10'5"
	C ft	4'0"
	D ft	8'5"
	E ft	16'5"
	F ft	3'3"
	G ft	5'8"
	H ft	13'11"
	I ft	0'3"

Accessories

CS 150
Cutter bar
max cut 1/2" - width of cut 59"

Flail head

TI 120
directe drive

Blades interchangeable on same motor

	No. 44 Multi-use blades: grass, shrubs, bushes, sticks, wood. max cut 1 1/4"		No. 22 "T" hammer blades for wood max cut 1 3/4"
--	-------------------------------------------------------------------------------------------	--	---------------------------------------------------------------

Technical specifications for flail heads		TI 120
Width of cut	in.	47
Rotor speed	RPM	3100
Flail head angle		190°



FERRI srl Via C. Govoni, 30 - 44034 Tamara (FE) Italy
Tel. 011-39-0532.866866 - Fax 011-39-0532.866851 - www.ferrisrl.it - info@ferrisrl.it

Customer Service Sales & Marketing/FERRI:

Don Garner
Vancouver, WA 98682
tel. 360-281-3641
d.garner@ferrisrl.it

Parts Stock / FERRI:

J.S. Woodhouse Co., Inc.
1314 Union Street
P.O. Box 1169
West Springfield, Ma. 01090 U.S.A.
tel. 413-736-5462
fax 413-732-3786
info@jswoodhouse.com