



Shown with optional side cutters and spill guard

4-IN-1 MULTIPURPOSE BUCKETS

For Skid Steers



Paladin Attachments is your single source for high quality attachments for skid steers, compact tool carriers, and excavators used for vegetation/land management, landscaping, soil preparation, material handling, and construction.

The Bradco 4-in-1 Multipurpose Bucket functions as a loader bucket, clam, grapple, dozer, box scraper and bottom dump bucket.



- Made of lightweight material with heavy duty hinges and pins
- Evenly distributes the load and provides the ability to handle more load capacity
- Available sizes include 66" and 72" utility grade and 72", 78" and 84" construction grade
- Hose saver spring kit is standard
- Optional spill guard, tooth bars and bolt on edges






Utility & Construction Grades

- Conventional or bottom dump buckets allows the operator to dump into high side board trucks
- Long-floor design improves cutting edge visibility, for maximum accuracy when grading
- Constructed of high tensile material for reduced weight and higher strength
- Optional removable spill plate for improved visibility

Construction Grade

- Dual check valve
- Spherical bushings on cylinder ends
- 1" x 6" cutter edge on front of clam and 3/4" x 6" high carbon edge on rear of clam
- Optional side cutters
- Optional bolt-on tooth bars
- Optional bolt-on tooth bar that will fit with bolt on edge

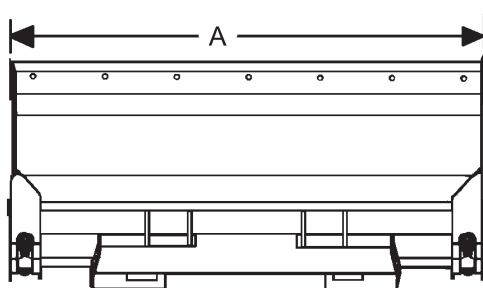

Specifications	Utility Grade		Construction Grade		
	MP66	MP72	MP72	MP78	MP84
Order Codes (w/o teeth)	108018	108020	108022	108024	108026
Order Codes (with teeth)	108019	108021	108023	108025	108027
A Width (overall)	66.96"	72.96"	73.00"	78.75"	84.75"
B. Height (overall)	27.32"	27.32"	27.69"	27.69"	27.69"
C. Length (overall)	34.47"	34.47"	37.47"	37.47"	37.47"
D. Clamp Length	23.06"	23.06"	26.00"	26.00"	27.00"
E. Back Blade Length	12.36"	12.36"	11.52"	11.52"	11.52"
F. Clamp Opening	34.64"	34.64"	34.79"	34.79"	34.79"
Operating Pressure (PSI)	2250	2250	3000	3000	3000
Clamping Force (lbs)	2354	2354	6400	6400	6400
Weight	620	655	900	935	975
Heaped Capacity (cu/ft)	15.76	17.23	19.99	21.69	23.40
Cylinder Specifications					
Bore	2.00"	2.00"	2.50"	2.50"	2.50"
Stroke	7.50"	7.50"	7.50"	7.50"	7.50"
Rod Diameter	1.12"	1.12"	1.25"	1.25"	1.25"

Optional spill guard, cylinder covers, tooth bars and bolt-on edges available.

Specifications and design are subject to change without notice and without liability, therefore, whenever applicable specifications are in accordance with SAE standards.

*When work needs to get done you need to be able to depend on your equipment.
Our material handling attachments are designed for maximum reliability,
durability, and productivity.*